

BOTO

BOTO



PRODUCT CATALOGUE
TBR TYRES

SHANDONG WANDA BOTO TYRE CO., LTD

WWW.BOTOTYRE.COM
ADDRESS:NO.77 TONGXING ROAD,KENLI
DISTRICT ,DONGYING CITY,SHANDONG
PROVINCE.CHINA 257506
E-mail:info@bototyre.com



CONTENT

- 03 CHINA WANDA GROUP
- 05 BOTO TYRE FACTORY
- 07 PRODUCT MATCH
- 09 PRODUCT SPECIFICATION

BOTO

BETTER OF TOMORROW




Gathering scientific and technological talents
Building up Wanda foundation evergreen

During the past 30 years development, Wanda Group makes vigorous efforts to become renowned through the three-step-development of "Soaring by Science and Technology, Creating Advantage by Brand Building and Developing by Cooperation", develops to become a large scale enterprise group with its business covering port logistics, petrochemicals, tires, finance and trade, etc.



Six Development Advantages

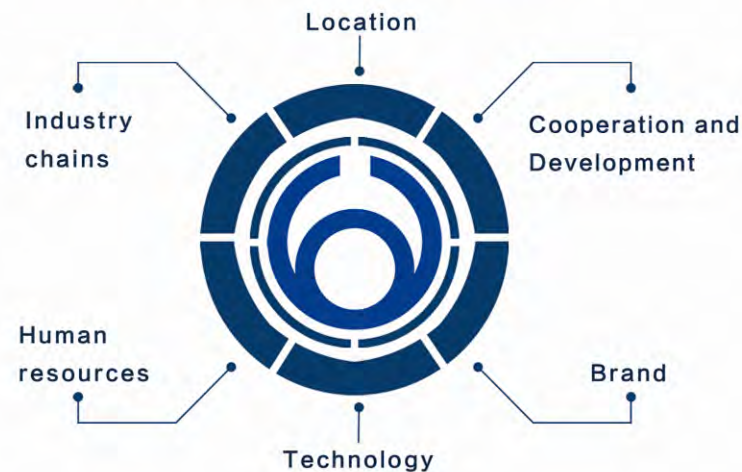

Shandong Wanda BOTO Tyre Co.Ltd

With annual production capacity of 15 million unit of PCR, 2.4 million unit of TBR, and 100,000 unit of OTR, BOTO ranks among the World Top 75 Tire Manufacturers and China Top 10 Tire Manufacturers. Products are exported to more than 168 countries and regions over the world, BOTO has been ranked China Top 500 Private Enterprises for five consecutive years.



October 2017, blockbuster landing before CCTV-1 News;
 January 2018, exclusively sponsored Premier League Night;
 January 2018, landed on CCTV Discovery Quality program;
 September 2018, landed USA's Times Square;
 June 2019, opened the official Tik Tok ID;
 August 2019, landed before CCTV-4 China News;
 September 2019, sponsored the National Day tribute film *My Motherland and Me*



BT118



- ▶ Mainly for drive axle, also applicable for steer wheel special pattern design, only applicable to driving on mining and bad roads with low speed
- ▶ Excellent grip and ride ability performance
- ▶ The pattern is good in self-cleaning, superior for wear and puncture resistance

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
10.00R20	18PR	278	1054	149/146	3250/3000	930/930	F	7.5	21
11.00R20	18PR	293	1085	152/149	3550/3250	930/930	F	8.0	22
12.00R20	20PR	315	1125	156/153	4000/3650	900/900	F	8.5	22



BT119



- ▶ Aggressive tread design for maximum traction on or off the road.
- ▶ Extra-deep tread for long original tread life.
- ▶ Low heating up resistance
- ▶ Open shoulder helps to provide good traction performance and self-cleaning capacity

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
12.00R24	20PR	315	1226	160/157	4500/4125	900/900	D	8.5	31



BT122



- ▶ Special pattern design only applicable for mining and bad road with low speed
- ▶ Aggressive lug tread for powerful grip
- ▶ Excellent traction performance and low heating up
- ▶ Special tread compounds for resistance to cuts, chips, tearing and irregular wear
- ▶ Sidewall protector design help shield casing against worksite cut, and with excellent anti-puncture performance

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
12R22.5	18PR	300	1085	152/149	3550/3250	930/930	F	9.00	24



BT128



- ▶ Mainly for drive axle on mining and bad roads with low speed
- ▶ Excellent traction with big block pattern design
- ▶ Special compound supply anti crack and anti puncture performance
- ▶ Good performance on carrying capacity

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
10.00R20	18PR	278	1054	149/146	3250/3000	930/930	D	7.5	24
11.00R20	18PR	293	1085	152/149	3550/3250	930/930	F	8.0	24
12.00R20	20PR	315	1125	156/153	4000/3650	900/900	F	8.5	24



BT151



- ▶ Aggressive lug tread for powerful grip on or off the road.
- ▶ Deep original tread for long life and outstanding traction.
- ▶ Special tread compounds help resist cuts, chips, tearing and irregular wear

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11.00R20	18PR	293	1085	152/149	3550/3250	930/930	J	8.0	20
12.00R20	20PR	315	1125	156/153	4000/3650	900/900	J	8.5	20.5



BT157



- ▶ Drive wheel application
- ▶ Mainly for regional and medium haul on mixed road condition
- ▶ Directed and mixed pattern with strengthening rib for good drive and brake performance
- ▶ Deep tread to extend tire service life
- ▶ Improved carcass in structure design for good carrying capacity

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
12.00R24	20PR	315	1226	160/157	4500/4125	900/900	K	8.5	19
325/95R24	22PR	325	1228	162/160	4750/4500	850/850	K	9.0	19.5



BT156



- ▶ Mainly for drive and trailer axle
- ▶ On-off highway application
- ▶ Excellent traction and brake performance
- ▶ Good carrying capacity and low heating up

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
12.00R24	20PR	315	1226	160/157	4500/4125	900/900	K	K	19
325/95R24	22PR	325	1228	162/160	4750/4500	850/850	K	K	19.5



BT159



- ▶ For regional application of drive axle and bearing axle on paved road surface
- ▶ The directional blocks and enhanced ribs offer good traction and braking performance
- ▶ Reinforced carcass structure design offer strong bearing capacity

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1050	148/145	3150/2900	850/850	K	8.25	22



BT168



- ▶ All position axls
- ▶ For regional application on various road
- ▶ With good performance in anti-cracking and tear resistance
- ▶ Low heating up and high speed performance

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
7.50R16LT	16PR	215	805	124/120	1600/1405	800/800	K	6.00G	12
8.25R16LT	16PR	235	855	128/124	1800/1600	770/770	K	6.50H	12
8.25R20	16PR	236	974	139/137	2430/2300	930/930	K	6.5	13.5
9.00R20	16PR	259	1019	144/142	2800/2650	900/900	K	7.0	15.5
10.00R20	18PR	278	1054	149/146	3250/3000	930/930	K	7.5	16.5
11.00R20	18PR	293	1085	152/149	3550/3250	930/930	K	8.0	17
12.00R20	20PR	315	1125	156/153	4000/3650	900/900	K	8.5	15
12.00R20	22PR	315	1125	158/155	4250/3875	900/900	J	8.5	15
11R22.5	16PR	279	1050	148/145	3150/2900	850/850	M	8.25	16
12R22.5	18PR	300	1085	152/149	3550/3250	930/930	L	9.00	17.5
13R22.5	18PR	320	1124	156/150	4000/3350	875/875	K	9.75	15
315/80R22.5	20PR	312	1076	156/150	4000/3350	850/850	L	9.00	15



BT168A



- ▶ All position axls
- ▶ For regional application on various road
- ▶ With good performance in anti-cracking and tear resistance
- ▶ Low heating up and high speed performance

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
12.00R24	20PR	315	1226	160/157	4500/4125	900/900	K	8.5	15



BT168N



- ▶ All position axls
- ▶ For regional application on various road
- ▶ With good performance in anti-cracking and tear resistance
- ▶ Low heating up and high speed performance

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1050	148/145	3150/2900	850/850	M	8.25	16
11R24.5	16PR	279	1104	149/146	3250/3000	830/830	L	8.25	16
255/70R22.5	16PR	255	930	140/137	2500/2300	800/800	M	7.50	16



BT188



- ▶ Mainly for drive axle on mix and bad road , such as construction road
- ▶ With good grip performance

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
12.00R20	20PR	315	1125	156/153	4000/3650	900/900	F	8.5	22
11R22.5	16PR	279	1054	146/143	3000/2725	830/830	G	8.25	24.5
11R24.5	16PR	279	1104	149/146	3250/3000	830/830	G	8.25	24.5
13R22.5	18PR	320	1124	156/150	4000/3350	875/875	K	9.75	22



BT212



- ▶ Mainly for rated load and long haul application for all position wheels. Especially for steer and trailer wheels
- ▶ Applicable for good road at high speed
- ▶ Four straight grooves design offer excellent handing and water drainage performance
- ▶ With cross sipe design to generate a good grip and low heating up performance

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1054	146/143	3000/2725	830/830	M	8.25	14
11R24.5	16PR	279	1104	149/146	3250/3000	830/830	L	8.25	14
285/75R24.5	16PR	283	1050	147/144	3075/2800	830/830	L	8.25	14
295/75R22.5	16PR	298	1014	146/143	3000/2725	830/830	L	9.00	14



BT215



- ▶ Long haul application of trailers
- ▶ For high speed riding on good roads
- ▶ Straight main slots design enhances handling performance and service life
- ▶ With high irregular wear resistance technology

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
ST235/85R16	14PR	235	806	132/127	2000/1750	760/760	L	6.50	9.5
275/70R22.5	16PR	276	958	148/145	3150/2900	900/900	M	8.25	19.2
275/70R22.5	18PR	276	958	148/145	3150/2900	900/900	J	8.25	19.2
385/55R22.5	20PR	386	996	160	4500	900	K	12.25	15
425/65R22.5	20PR	430	1124	165	5150	825	K	12.25	15
ST225/90R16	14PR/G	220	808	128/124	1800/1600	830/830	K	6.00	12
ST235/80R16	14PR/G	235	782	128/124	1800/1600	725/725	L	6.50	9.5
435/50R19.5	20PR	438	931	160	4500	900	J	14.00	14



BT212N



- ▶ Mainly for rated load and long haul application for all position wheels. Especially for steer and trailer wheels
- ▶ Applicable for good road at high speed
- ▶ Four straight grooves design offer excellent handing and water drainage performance
- ▶ With cross sipe design to generate a good grip and low heating up performance

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1054	146/143	3000/2725	830/830	M	8.25	14
11R24.5	16PR	279	1104	149/146	3250/3000	830/830	L	8.25	14
255/70R22.5	16PR	255	930	140/137	2500/2300	800/800	M	7.50	14
285/75R24.5	16PR	283	1050	147/144	3075/2800	830/830	L	8.25	14
295/75R22.5	16PR	298	1014	146/143	3000/2725	830/830	L	9.00	14



BT215N



- ▶ Long haul application of trailers
- ▶ For high speed riding on good roads
- ▶ Straight main slots design enhances handling performance and service life
- ▶ With high irregular wear resistance technology

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE (kpa)	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
385/65R22.5	20PR	389	1072	164	5000	900	K	11.75	15



BT217



- ▶ Mainly for long haul application and all position wheels on praved road
- ▶ Optimized grooves offer good handing performance –
- ▶ Optimized stone rejecter sipping help prevent retention of damaging stones.

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
7.00R16LT	14PR	200	775	118/114	1320/1180	770/770	L	5.50F	10



BT216



- ▶ Mainly for long haul application of light truck and all position wheels on good road
- ▶ For longitudinal grooves design exactly accords with quick movement feature of light truck
- ▶ Low heating up compound ensures good wear resistance and fuel saving
- ▶ Continuous pattern in shoulder avoids tire irregular wear

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
7.50R16LT	16PR	215	805	124/120	1600/1405	800/800	K	6.00G	12



BT218



- ▶ Mainly for long haul of steer and trailer wheels
- ▶ Cold-running Tyre
- ▶ Applicable to ride on good road and highway

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1054	146/143	3000/2725	830/830	M	8.25	14.8



BT219



- ▶ All position
- ▶ Applicable for regional and long haul on paved road

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
12R22.5	18PR	300	1085	152/149	3550/3250	930/930	L	9.00	14.8
275/80R22.5	16PR	276	1012	149/146	3250/3000	850/850	L	8.25	15
295/60R22.5	16PR	292	926	149/146	3250/3000	900/900	L	9.00	14.8
295/80R22.5	18PR	298	1044	152/149	3550/3250	900/900	M	9.00	14.8
315/60R22.5	16PR	313	950	152/148	3550/3150	900/900	L	9.75	14.8
315/80R22.5	20PR	312	1076	156/150	4000/3350	850/850	L	9.00	15.5



BT288



- ▶ All position application
- ▶ Applicable to normal and good road
- ▶ With good anti-skid and irregular wear resistance
- ▶ Four grooves, low rolling resistance

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
7.50R16LT	16PR	215	805	124/120	1600/1405	800/800	K	6.00G	11
8.25R16LT	16PR	235	855	128/124	1800/1600	770/770	K	6.50H	12



BT267



- ▶ For all position wheels
- ▶ Applicable for regional and long haul on paved road
- ▶ With excellent grip and traction, anti-skidding performance low noise; better fuel efficiency

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE (kpa)	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
385/65R22.5	20PR	389	1072	164	5000	900	K	11.75	17



BT316



- ▶ Excellent anti-overloading and excellent wear resistance
- ▶ Wide tread and Complex groove angle to improve the irregular wear and long tread life

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
325/95R24	22PR	325	1228	162/160	4750/4500	850/850	K	9.0	17



BT360



- ▶ For all position wheels
- ▶ Designed for light truck, agricultural vehicles and light dump truck.
- ▶ Excellent traction performance
- ▶ Low heating up shoulder design.

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
6.50R16LT	12PR	185	750	110/105	1060/925	670/670	L	5.50F	12
7.00R16LT	14PR	200	775	118/114	1320/1180	770/770	L	5.50F	14
315/80R22.5	20PR	312	1076	156/150	4000/3350	850/850	L	9.00	15.5



BT369N



- ▶ For long haul application of truck and all positions wheels on good roads;
- ▶ With wide tread design to extend tire service life;
- ▶ With excellent water drainage and heat dispersion performance;
- ▶ This pattern has performance in low heating up and rolling resistance.

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1054	146/143	3000/2725	830/830	L	8.25	17.5



BT369



- ▶ For long haul application of truck and all positions wheels on good roads;
- ▶ With wide tread design to extend tire service life;
- ▶ With excellent water drainage and heat dispersion performance;
- ▶ This pattern has performance in low heating up and rolling resistance.

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
295/80R22.5	18PR	298	1044	152/149	3550/3250	900/900	M	9.00	18
315/80R22.5	20PR	312	1076	156/150	4000/3350	850/850	L	9.00	18



BT370



- ▶ All positions application design
- ▶ The optimized contour design offer the tire long service life
- ▶ The broken-line pattern groove design offer excellent traction and braking performance, and more comfortable

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1054	146/143	3000/2725	830/830	L	8.25	14.5



BT388



- ▶ For regional application of drive axle
- ▶ Applicable to various road surface on freeway
- ▶ With good grip and traction performance
- ▶ Excellent wear resistance and long mileage

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1050	148/145	3150/2900	850/850	M	8.25	20
295/80R22.5	18PR	298	1044	152/149	3550/3250	900/900	M	9.00	20.5
315/70R22.5	18PR	312	1014	154/150	3750/3350	900/900	M	9.00	19
315/80R22.5	20PR	312	1076	156/150	4000/3350	850/850	L	9.00	21



BT389



- ▶ Aggressive, open-shoulder design helps deliver long tread life and traction.
- ▶ Extensive lug and siping to improve traction on wet and dry surfaces, and the extra-wide tread helps deliver added stability. Especially in deep snow

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1054	146/143	3000/2725	825/825	L	8.25	21
11R24.5	16PR	279	1104	149/146	3250/3000	825/825	L	8.25	21



BT388N



- ▶ For long haul application of truck and all positions wheels on good roads;
- ▶ With wide tread design to extend tire service life;
- ▶ With excellent water drainage and heat dispersion performance;
- ▶ This pattern has performance in low heating up and rolling resistance.

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
12R22.5	18PR	300	1085	152/149	3550/3250	930/930	L	9.00	20
295/80R22.5	18PR	298	1044	152/149	3550/3250	900/900	M	9.00	21
315/80R22.5	20PR	312	1076	156/150	4000/3350	850/850	L	9.00	21



BT398+



- ▶ Mainly used for drive wheel
- ▶ For long haul application on paved road
- ▶ Deep tread depth and wide tread crown offers long mileage
Unique tread block ensures good traction and brake performance

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
315/80R22.5	20PR	312	1076	156/150	4000/3350	850/850	L	9.00	24



BT398N



- ▶ Drive wheel application
- ▶ For standard load and high speed long haul application on paved road
- ▶ Deep grooves and wide tread design to extend tire service life
- ▶ Excellent brake and drive performance with special lug pattern design

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
10.00R20	18PR	278	1054	149/146	3250/3000	930/930	K	7.5	19.5



BT556



- ▶ Close shoulder design
- ▶ Mainly for drive wheel
- ▶ Fuel saving for low rolling resistance
- ▶ Excellent water drainage
- ▶ Excellent grip and traction performance

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1054	146/143	3000/2725	830/830	L	8.25	20.5
11R24.5	16PR	279	1104	149/146	3250/3000	830/830	L	8.25	20.5
255/70R22.5	16PR	255	930	140/137	2500/2300	800/800	M	7.50	20.5
285/75R24.5	16PR	283	1050	147/144	3075/2800	830/830	L	8.25	20.5
295/75R22.5	16PR	298	1014	146/143	3000/2725	830/830	L	9.00	20.5



BT518



- ▶ All position application
- ▶ Mainly for good road surface
- ▶ With good grip and excellent traction performance

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE (kpa)	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
385/65R22.5	20PR	389	1072	164	5000	900	K	11.75	17



BT566



- ▶ Drive application for long haul and regional haul service
- ▶ Deep tread depth helps to provide long original life
- ▶ Aggressive tread pattern design helps to provide excellent traction
- ▶ Continuous shoulder ribs to fight irregular wear

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1054	146/143	3000/2725	830/830	L	8.25	20.5
11R24.5	16PR	279	1104	149/146	3250/3000	830/830	L	8.25	20.5
285/75R24.5	16PR	283	1050	147/144	3075/2800	830/830	L	8.25	20.5
295/75R22.5	16PR	298	1014	146/143	3000/2725	830/830	L	9.00	20.5



BT568



- ▶ All position application
- ▶ Applicable for mix and bad road condition
- ▶ With good performance in anti-cracking and tear resistance
- ▶ The pattern has excellent performance in irregular wear resistance

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
10.00R20	18PR	278	1054	149/146	3250/3000	930/930	K	7.5	16.5
12.00R24	20PR	315	1226	160/157	4500/4125	900/900	K	8.5	15



BT588



- ▶ Close shoulder design
- ▶ Mainly for drive wheel
- ▶ Fuel saving for low rolling resistance
- ▶ Excellent water drainage
- ▶ Excellent grip and traction performance

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1050	148/145	3150/2900	850/850	M	8.25	20
295/80R22.5	18PR	298	1044	152/149	3550/3250	900/900	M	9.00	21
315/80R22.5	20PR	312	1076	156/150	4000/3350	850/850	L	9.00	21



BT577



- ▶ Aggressive, open-shoulder design helps deliver
- ▶ Long tread life and traction
- ▶ Mainly for drive wheel
- ▶ Extensive block siping improves traction by slicing through water for a solid grip on wet roads.
- ▶ Light On/Off-Highway Service / Regional Haul Service
- ▶ Pickup & Delivery Service Long Haul Service / Regional Haul Service

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1050	148/145	3150/2900	850/850	M	8.25	20.5
11R24.5	16PR	279	1104	149/146	3250/3000	830/830	L	8.25	20.5
285/75R24.5	16PR	283	1050	147/144	3075/2800	830/830	L	8.25	20.5
295/75R22.5	16PR	298	1014	146/143	3000/2725	830/830	L	9.00	20.5



BT666



- ▶ TT/TL Dual mode
- ▶ Excellent anti-overloading and excellent wear resistance
- ▶ Wide tread and Complex groove angle to improve the irregular wear and long tread life

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
325/95R24	22PR	325	1228	162/160	4750/4500	850/850	K	9.0	17.5



BT667



- ▶ Mainly for trailer wheel
- ▶ Optimum tread design effectively provides superior stability, excellent lateral traction and resistance to irregular wear
- ▶ Long original tread life

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1054	146/143	3000/2725	830/830	L	8.25	10
11R24.5	16PR	279	1104	149/146	3250/3000	830/830	L	8.25	10
285/75R24.5	16PR	283	1050	147/144	3075/2800	830/830	L	8.25	10
295/75R22.5	16PR	298	1014	146/143	3000/2725	830/830	L	9.00	10



BT669



- ▶ Mainly for trailer wheel
- ▶ Fuel saving for low rolling resistance
- ▶ Long mileage and low cost per mile

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1054	146/143	3000/2725	830/830	L	8.25	10
11R24.5	16PR	279	1104	149/146	3250/3000	830/830	L	8.25	10
285/75R24.5	16PR	283	1050	147/144	3075/2800	830/830	L	8.25	10
295/75R22.5	16PR	298	1014	146/143	3000/2725	830/830	L	9.00	10



BT668



- ▶ Good loading capacity, low rolling resistance and low noise
- ▶ With excellent water drainage and skip performance
- ▶ Mainly for trailer wheel, also applicable for steer wheel
- ▶ Applicable for medium and high speed transportation on good roads

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
385/65R22.5	20PR	389	1072	164	5000	900	K	11.75	15



BT688



- ▶ Mainly for steer axle, especially applicable for high way and urban roads
- ▶ Applicable for normal and good road surface
- ▶ With good stable ability and wear resistance
- ▶ Comfortable and fuel saving

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
275/70R22.5	18PR	276	958	148/145	3150/2900	900/900	J	8.25	14.8
315/70R22.5	18PR	312	1014	154/150	3750/3350	900/900	M	9.00	15



BT712



- ▶ For delivery and pick up application of drive axle and bearing axle on mix road surface
- ▶ The directional blocks and enhanced ribs offer good traction and braking performance

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
315/80R22.5	20PR	312	1076	156/150	4000/3350	850/850	K	9.00	19



BT926



- ▶ All position application
- ▶ Applicable to normal and good road
- ▶ With good anti-skid and irregular wear resistance
- ▶ Four grooves, low rolling resistance

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
215/75R17.5	16PR	212	767	135/133	2180/2060	850/850	J	6.00	13
225/70R19.5	14PR	226	811	128/126	1800/1700	760/760	M	6.75	13.5
235/75R17.5	16PR	233	797	143/141	2725/2575	875/875	J	6.75	13.5
245/70R19.5	16PR	248	839	136/134	2240/2120	825/825	M	7.50	13.5
9.5R17.5	18PR/J	240	842	143/141	2725/2575	875/875	M	6.75	12.5



BT718



- ▶ Mainly for short distance transportation
- ▶ On-off highway application
- ▶ High tread depth to provide long original tread life
- ▶ Open shoulder helps to provide good traction performance and self-cleaning capacity

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
7.50R16LT	16PR	215	805	124/120	1600/1405	800/800	L	6.00G	13.5
8.25R16LT	16PR	235	855	128/124	1800/1600	770/770	K	6.50H	15



BT929



- ▶ Mainly for steer axle, especially applicable for high way and urban roads
- ▶ Applicable for normal and good road surface
- ▶ With good stable ability and wear resistance
- ▶ Comfortable and fuel saving

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
10R22.5	16PR	254	1019	144/142	2800/2650	900/900	L	7.50	14.5
265/70R19.5	18PR	262	867	143/141	2725/2575	850/850	J	7.50	13.5



BT957



- ▶ Mainly for drive wheels
- ▶ Applicable for medium and high speed riding on normal and good roads
- ▶ With excellent grip and traction performance

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
215/75R17.5	16PR	212	767	135/133	2180/2060	850/850	J	6.00	14.5
225/70R19.5	14PR	226	811	128/126	1800/1700	760/760	L	6.75	15
235/75R17.5	18PR	233	797	143/141	2725/2575	875/875	J	6.75	15.4
245/70R19.5	16PR	248	839	136/134	2240/2120	825/825	M	7.50	16
265/70R19.5	18PR	262	867	143/141	2725/2575	850/850	J	7.50	15.5
9.5R17.5	18PR/J	240	842	143/141	2725/2575	875/875	K	6.75	15.5



BT968N



- ▶ Mainly for long haul application of steer wheel, also applicable for trailer wheel
- ▶ Applicable to ride on high way and good road with speed
- ▶ With good performance of water drainage and skid resistance
- ▶ Low heating up and low rolling resistance performance

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
295/80R22.5	18PR	298	1044	152/149	3550/3250	900/900	M	9.00	15



BT968



- ▶ Mainly for long haul application of steer wheel, also applicable for trailer wheel
- ▶ Applicable to ride on high way and good road with speed
- ▶ With good performance of water drainage and skid resistance
- ▶ Low heating up and low rolling resistance performance

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
295/80R22.5	18PR	298	1044	152/149	3550/3250	900/900	M	9.00	15
315/80R22.5	20PR	312	1076	156/150	4000/3350	850/850	L	9.00	15